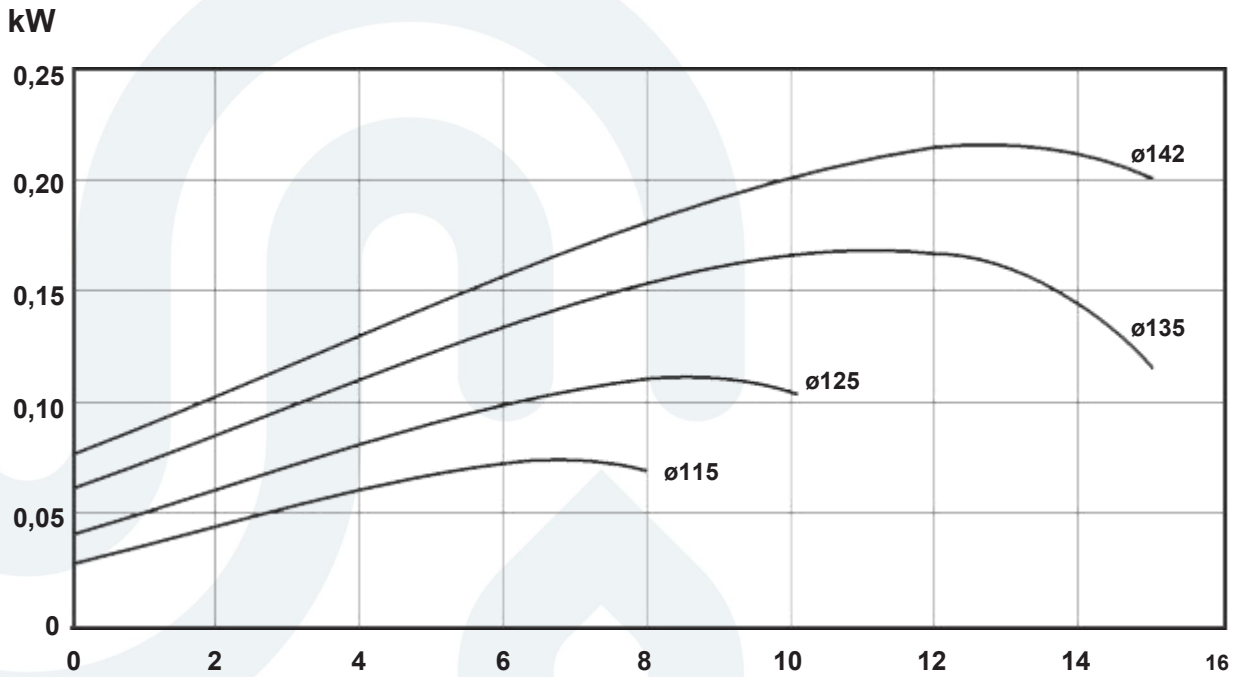
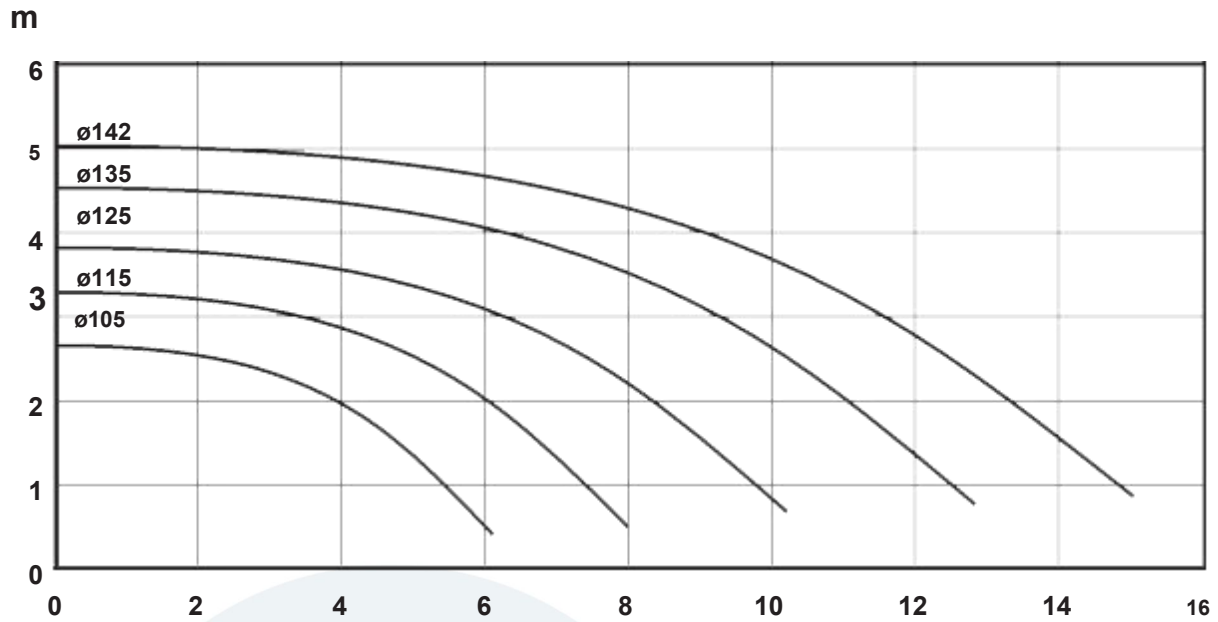


453402 ISS Q 10.03

 NOTE: _____

 Low flow impeller
 Speed: **n=1450⁻¹ 50 Hz**
 Impeller: **Max. dia 142 mm**
 Min. dia 105 mm
 Pump inlet: **51 mm**
 Pump outlet: **51 mm**

 Performance data refer to water at 20°C
 Permissible tolerance ±5%

Flow m³/h

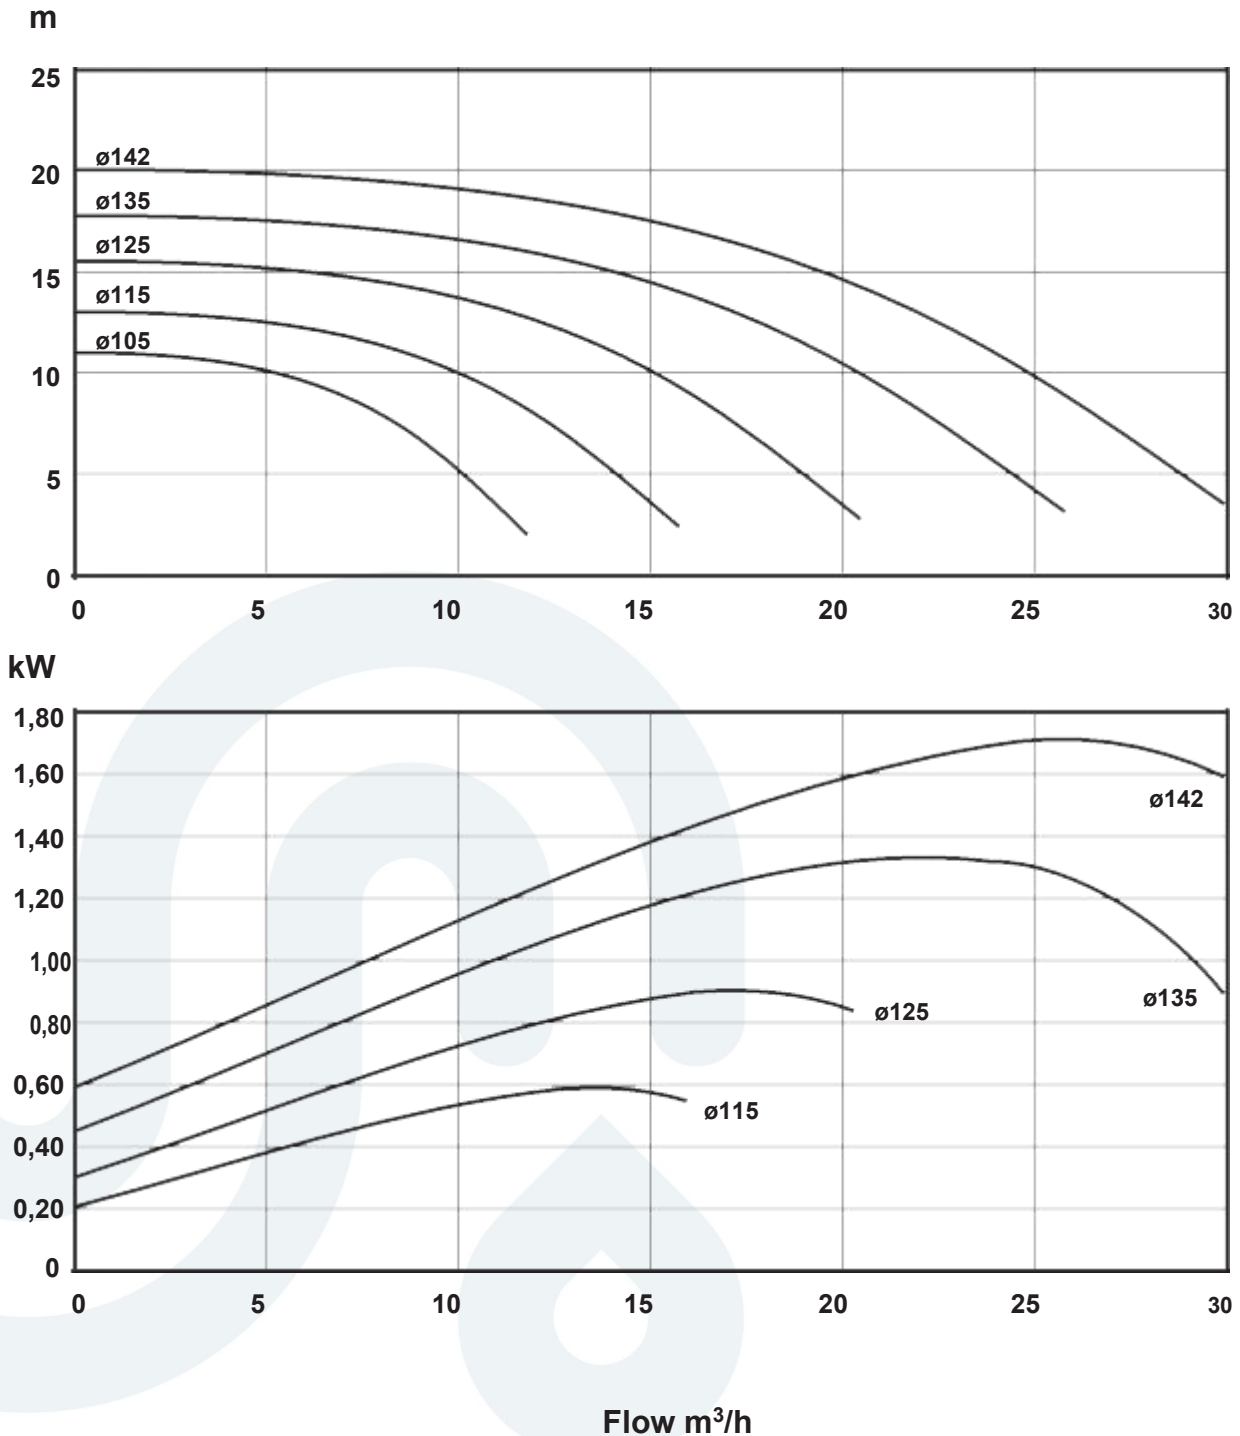
453402 ISS Q 10.03

NOTE: _____

Low flow impeller

 Speed: **N=2900⁻¹ 50 Hz**
 Impeller: **Max. dia 142 mm**
 Min. dia 105 mm

 Pump inlet: **51 mm**
 Pump outlet: **51 mm**

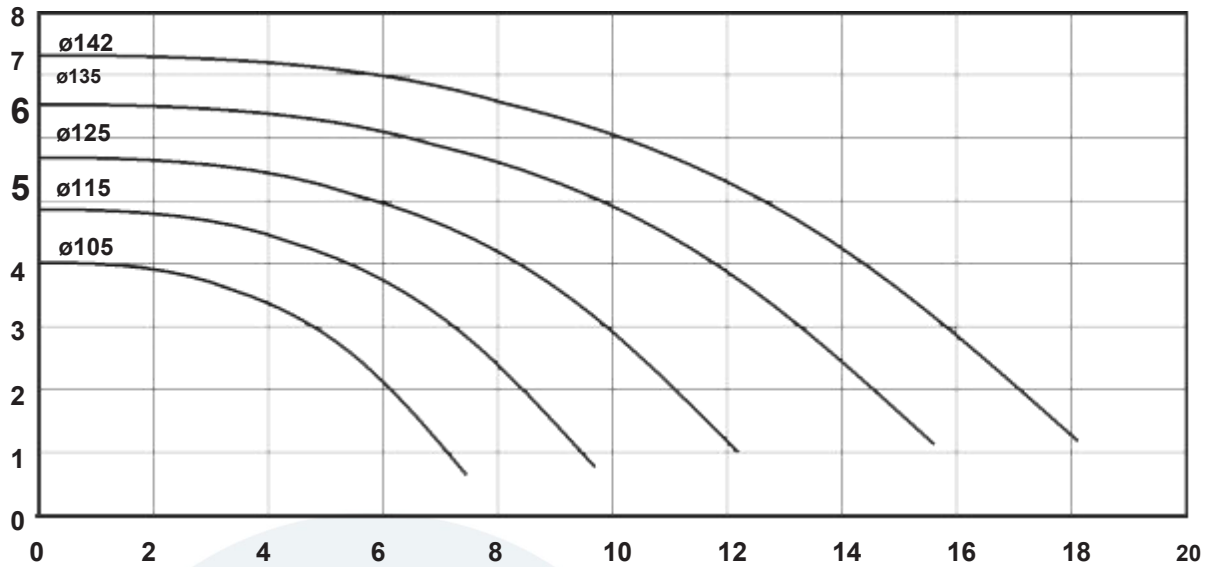
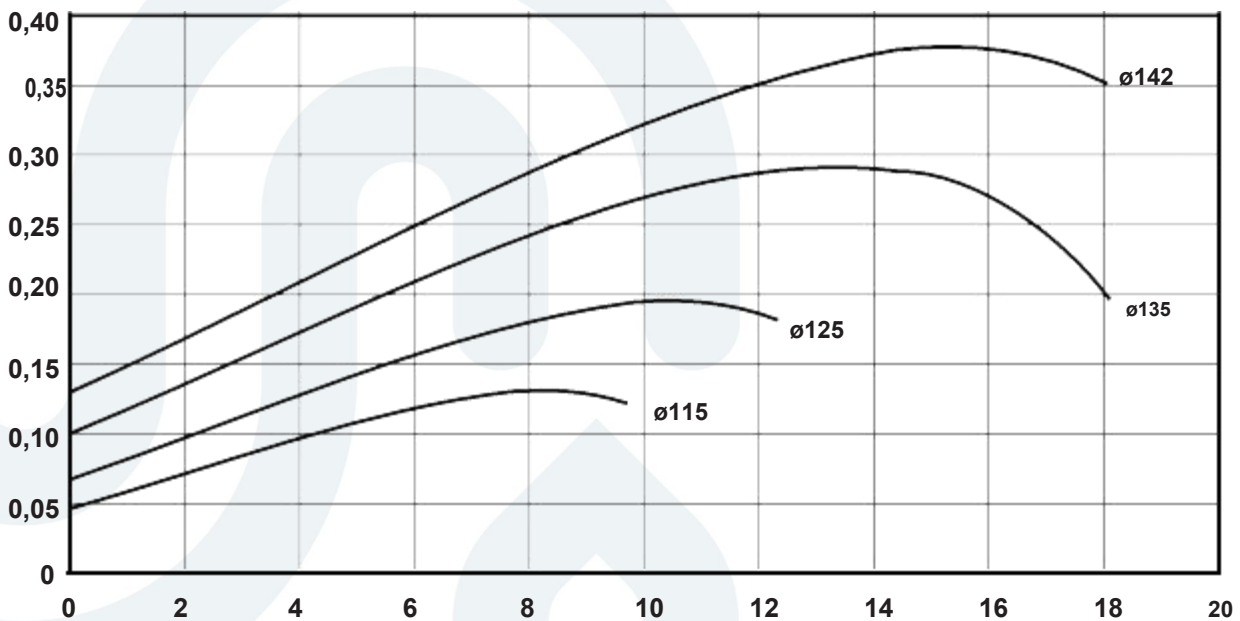
 Performance data refer to water at 20°C
 Permissible tolerance ±5%


453402 ISS Q 10.03

NOTE: _____

Low flow impeller
 Speed: **N=1750⁻¹ 60 Hz**
 Impeller: **Max. dia 142 mm**
 Min. dia 105 mm
 Pump inlet: **51 mm**
 Pump outlet: **51 mm**

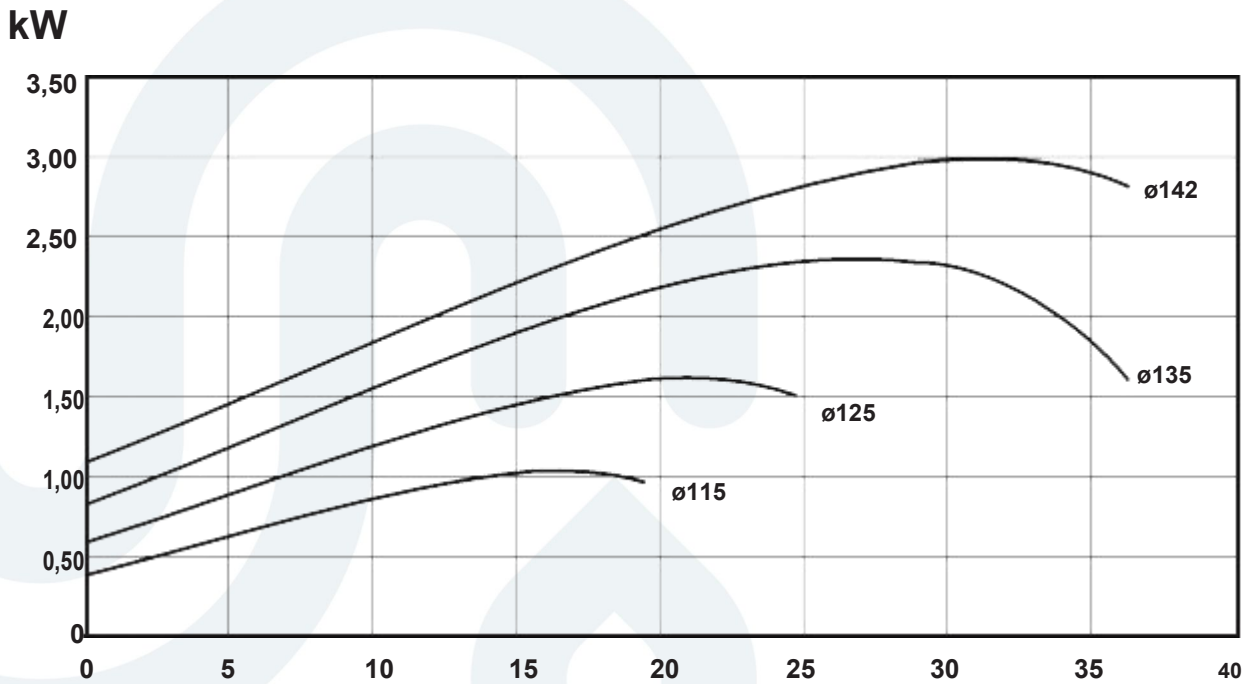
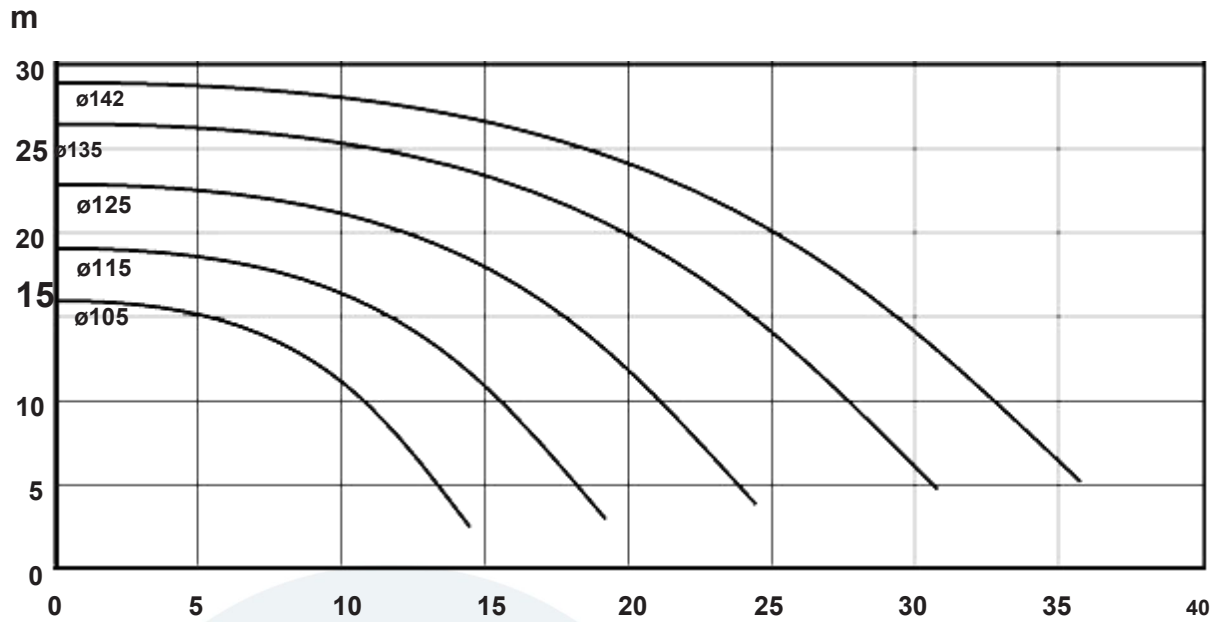
Performance data refer to water at 20°C
 Permissible tolerance ±5%

m

kW

Flow m³/h

453402 ISS Q 10.03

 NOTE: _____

 Low flow impeller
 Speed: **N=3500⁻¹ 60 Hz**
 Impeller: **Max. dia 142 mm**
 Min. dia 105 mm
 Pump inlet: **51 mm**
 Pump outlet: **51 mm**

 Performance data refer to water at 20°C
 Permissible tolerance ±5%

Flow m³/h