


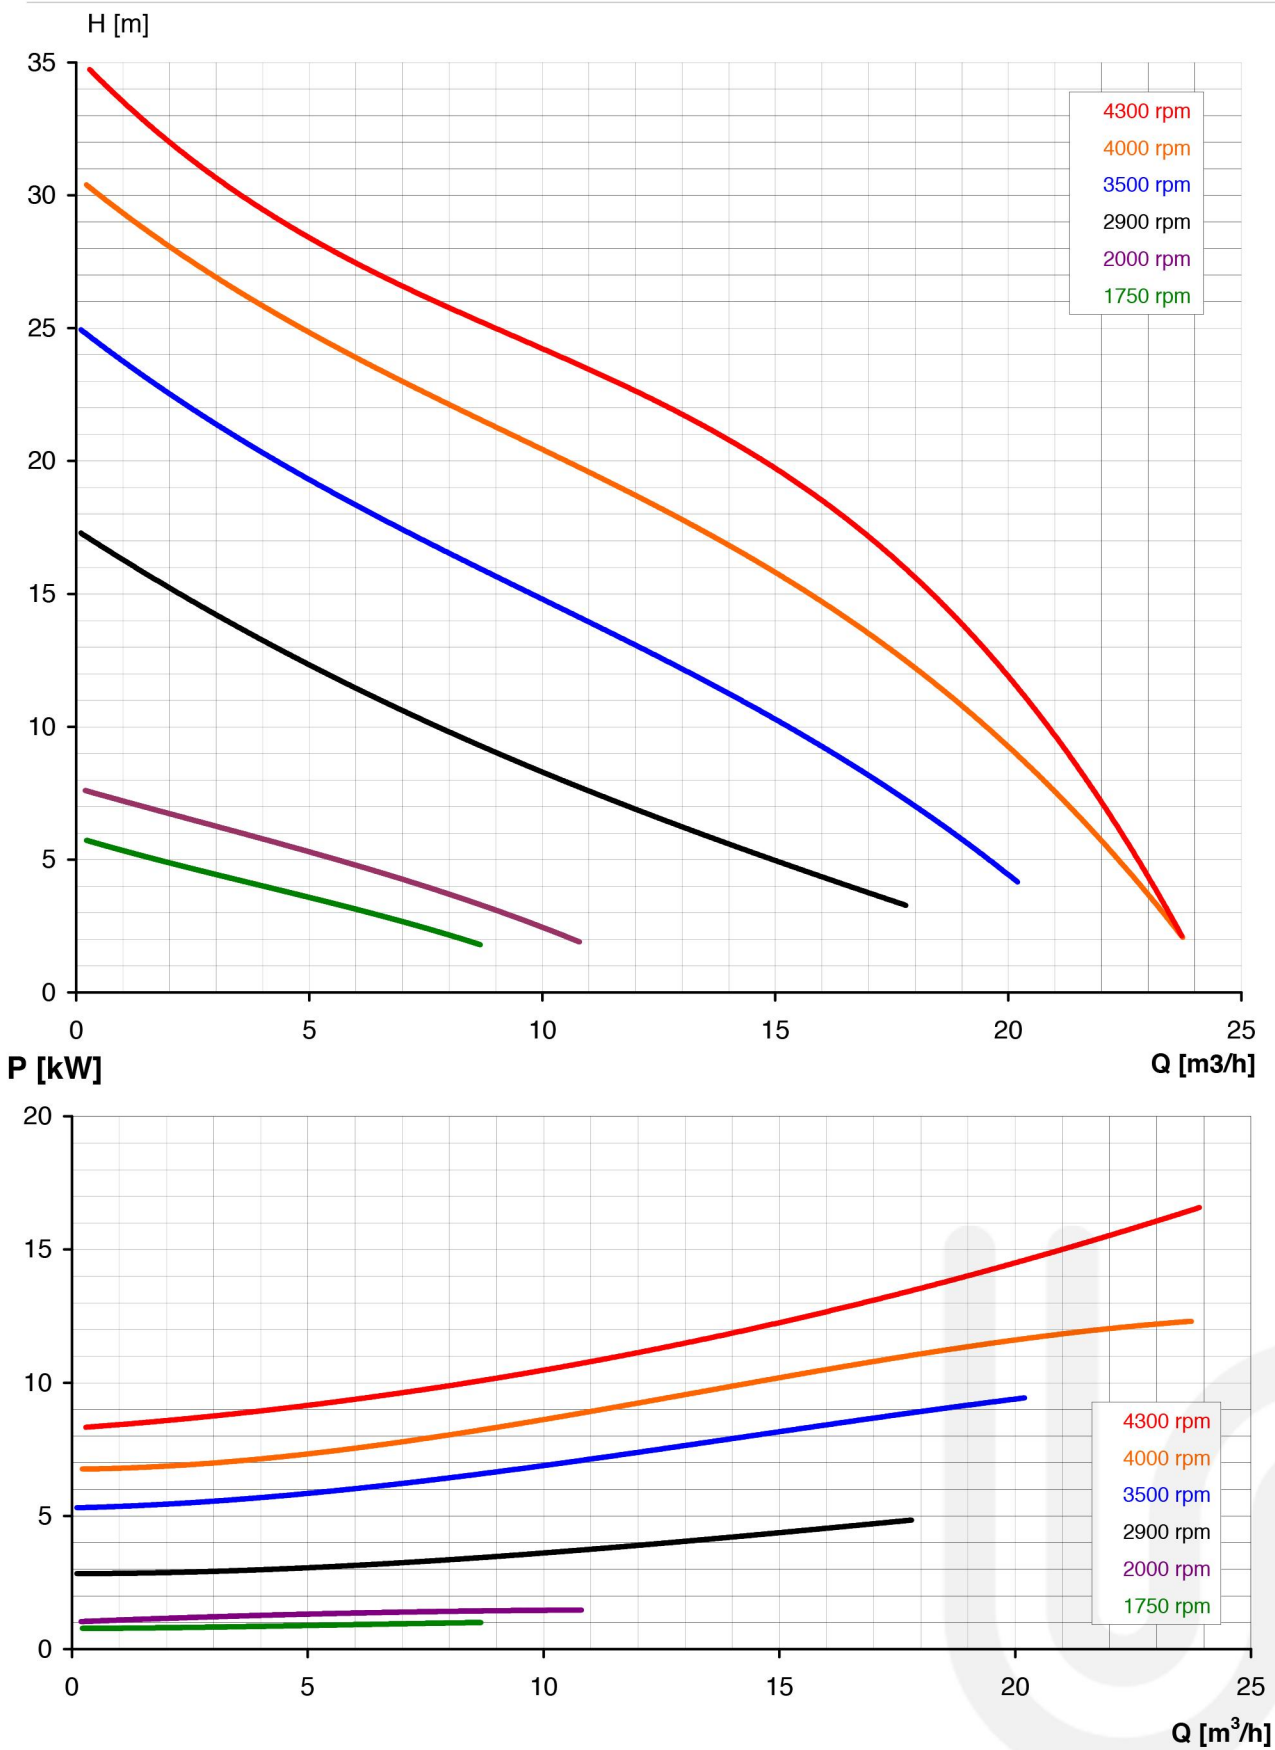

Allowed fluctuation of performance $\pm 5\%$
All data of water at 20°C

Suction side: DN 65
Delivery side: DN 50

$n = 1750 - 4300 \text{ rpm}$

SP220-5-4

Performance Curve